
LEX 150/3-M /7-M

Änderungen vorbehalten
The right of modification is reserved



Gültig für / Valid for: B.Nr. 692 059 B.Nr. 691 060

Bitte B.Nr. bei Ersatzteilbestellungen angeben! Please give B.Nr. when ordering spare pieces!

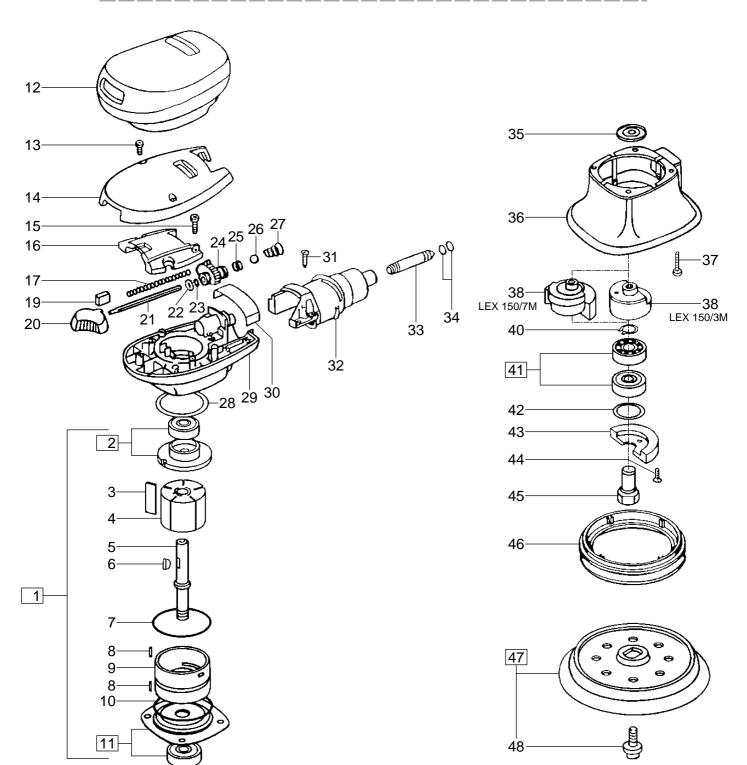

Pos.	Best-Nr./Symbol	St.	Pos.	Best-Nr./Symbol	St.	Pos.	Best-Nr./Symbol	St.	Pos.	Best-Nr./Symbol	St.	Pos.	Best-Nr./Symbol	St.	Pos.	Best-Nr./Symbol	St.
Item	Order/Symbols	Qty.	Item	Order/Symbols	Qty.	Item	Order/Symbols	Qty.	Item	Order/Symbols	Qty.	Item	Order/Symbols	Qty.	Item	Order/Symbols	Qty.
1	630 116	1	11	630 109	1	ı	720 602	1	32	448 632	1	42	443 660	1			
2	630 103	1	12	720 570	1	23	200 904 O - Ring	1		448 805	1	43	445 140 150/3-M	1			
3	433 443	• 5	13	228 713	2	ı	720 478	1	34	204 118 O - Ring 6 x 1	2	44	228 737 150/3-M	1			
4	720 623	1	14	720 468	1	25	206 490 O - Ring	2	35	782 082 •	1	45	720 438	1			
1 -	720 089	1	15	228 567	2	26	410 290	1	36	720 442	1	46	447 517	1			
6	209 338 3 x 5 DIN 6888	1	16	720 464	1	27	450 626	1	37	228 567	4	47	486 381 150/7-M	1			
7	217 178 O - Ring 51,5 x 1,5	1	17	720 247	1	28	720 246	1	38	445 139 150/3-M	1	47	486 382 150/3-M	1			
8	773 627 2 x 6 DIN 7346	2	19	720 476	1	29	488 039	1	38	486 794 150/7-M •	1	48	485 802	1			
9	720 418	1	20	720 477	1	30	720 616	1	40	200 619 DIN 471	1						
10	782 327 O - Ring 60 x 1,5	1	21	720 475	1	31	228 713	4	41	400 048 6001 RS DIN 625	2						